


# CAN-AC PC/104

## Universal PC/104 Boards with On-Board Microcontroller

Single and dual channel interface boards in PC/104 format for use in CAN and CANopen networks.

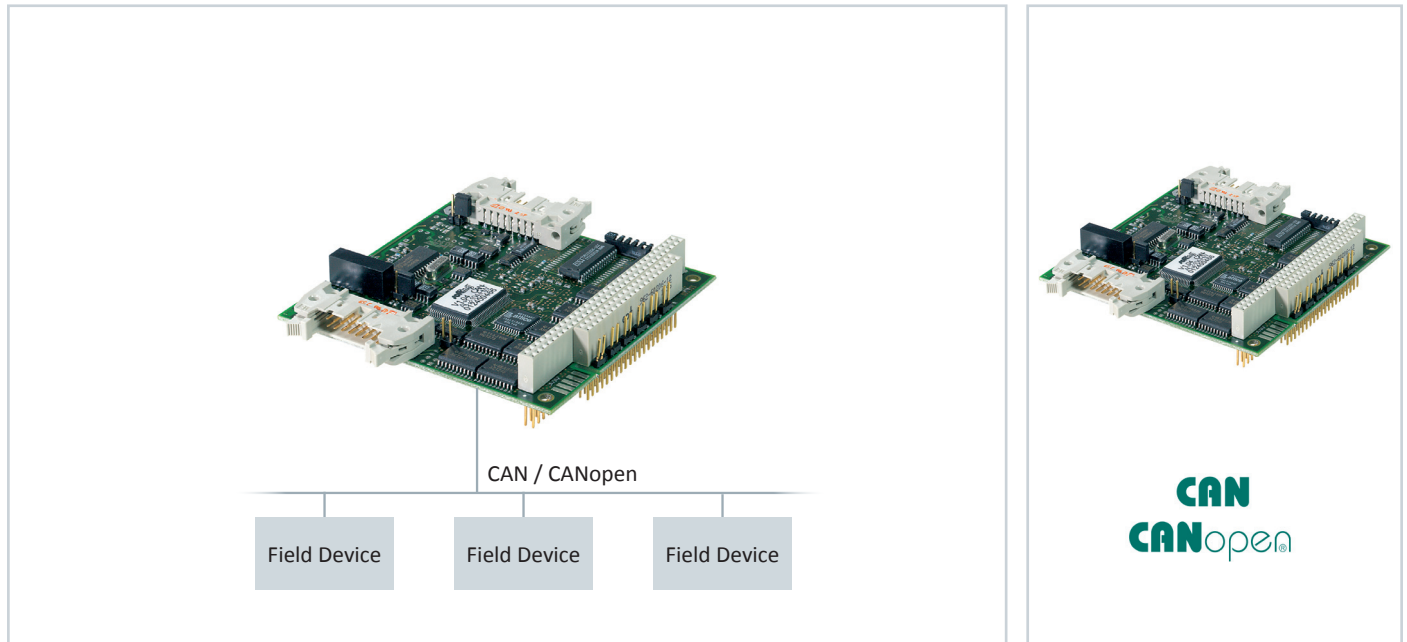

### Flexible Interface for Industrial and Embedded PCs

- Data exchange between PC applications and connected CAN bus
- Available in single and dual channel versions
- Universal solution matching almost any CAN application
- Use, for instance, in machine controllers, PC-based applications, test rigs or real-time simulations
- Integration in Mathworks xPC Target




### Rapid Integration with Right Software Interface

- Flexible API including FIFO storage buffering all sent and received messages, separately for each channel
- No data loss when computer working on other tasks
- Filtering and buffering of messages of interest
- Automatic transmission of data to bus in exact, individually configurable cycles
- Free CANopen Client API available for use in CANopen networks

### Suitable for Many Target Systems and Harsh Environments

- Support of Windows and many other operating systems and real-time environments
- Extended temperature version available supporting operating temperature range between -40 °C and +85 °C
- Interface adjustable according to special requirements for series use, including hardware adaptations

## Technical Data

	Single Channel	Dual Channel	Dual Channel, Extended Temperature Range
<b>CAN Protocol and Available APIs</b>			
CAN V2.0 (11/29 Bit IDs)	•	•	•
CAN API	•	•	•
CANopen Client API	•	•	•
<b>CAN Bus Connection</b>			
Connector	9-pin D-sub male on ribbon cable		
No. of Channels	1	2	2
Galvanically Isolated	•	•	•
Physical Layer	ISO 11898-2 (CAN High Speed)		
PC Interface	PC/104, 8 Bit, 4 KB address space in the range of C0000xH ... FFC00xH		
Interrupts	5, 9, 10, 11, 12, 15		
Operating Temperature	0 °C ... +70 °C		-40 °C ... +85 °C
Storage Temperature	-20 °C ... +70 °C		-40 °C ... +85 °C
Relative Humidity	< 90 %, non-condensing		
Dimensions	90,2 mm x 96 mm		
<b>Power supply</b>			
Supply voltage		5 VDC (±5 %)	
Current consumption	Typically 90 mA	Typically 130 mA	Typically 130 mA
Drivers available for	Windows XP, Windows 7, Windows 8, Windows 10, DOS, Linux		
Conformity	  		

## Scope of Delivery

Hardware	PC interface board
Software	Drivers, APIs, sample programs on CD-ROM
Documentation	On CD-ROM

## Order Numbers

	Single Channel	Dual Channel	Dual Channel, Extended Temperature Range
	CAN-AC1-104	CAN-AC2-104	CAN-AC2-104I

optimize!  
**softing**

**Softing Industrial Automation GmbH**  
Richard-Reitzner-Allee 6  
85540 Haar / Germany  
Tel.: +49 89 456 56-340  
Fax: +49 89 456 56-488  
info.automation@softing.com  
http://industrial.softing.com

**Softing Inc.**  
US Headquarter  
7209 Chapman Highway  
Knoxville, TN 37920 / USA  
Tel.: +1 865 251 52 52  
Fax: +1 865 579 47 40  
info@softing.us  
http://www.softing.us

**Softing Industrial Automation GmbH**  
Äußere Sulzbacher Straße 159-161  
90491 Nürnberg / Germany  
Tel.: +49 911 544 27-0  
Fax: +49 911 544 27-27  
info.automation@softing.com  
http://industrial.softing.com

**Softing Inc.**  
US Sales Office  
29 Water Street, Suite 301  
Newburyport, MA 01950 / USA  
Tel.: +1 978 499 96 50  
Fax: +1 978 499 96 54  
info@softing.us  
http://www.softing.us

**Buxbaum Automation GmbH**  
Thomas-Alva-Edison-Straße 1  
7000 Eisenstadt / Austria  
Tel.: +43 2682 704 560  
Fax: +43 2682 205 77 00-5610  
office@myautomation.at  
http://myautomation.at

**Softing Italia Srl**  
Via Padre Massimiliano Kolbe, 6  
20090 Cesano Boscone (MI) / Italy  
Tel.: +39 02 450 51 71  
Fax: +39 02 450 41 41  
info@softingitalia.it  
http://softingitalia.it

Your local Softing Contact