


FG-200

FF Network Integration via Modbus Including Redundancy

- Implementation of FF advantages in Modbus host systems
- Usage as a redundant link
- Interface for Plant Asset Management applications
- Functionally advanced and easy-to-integrate gateway package

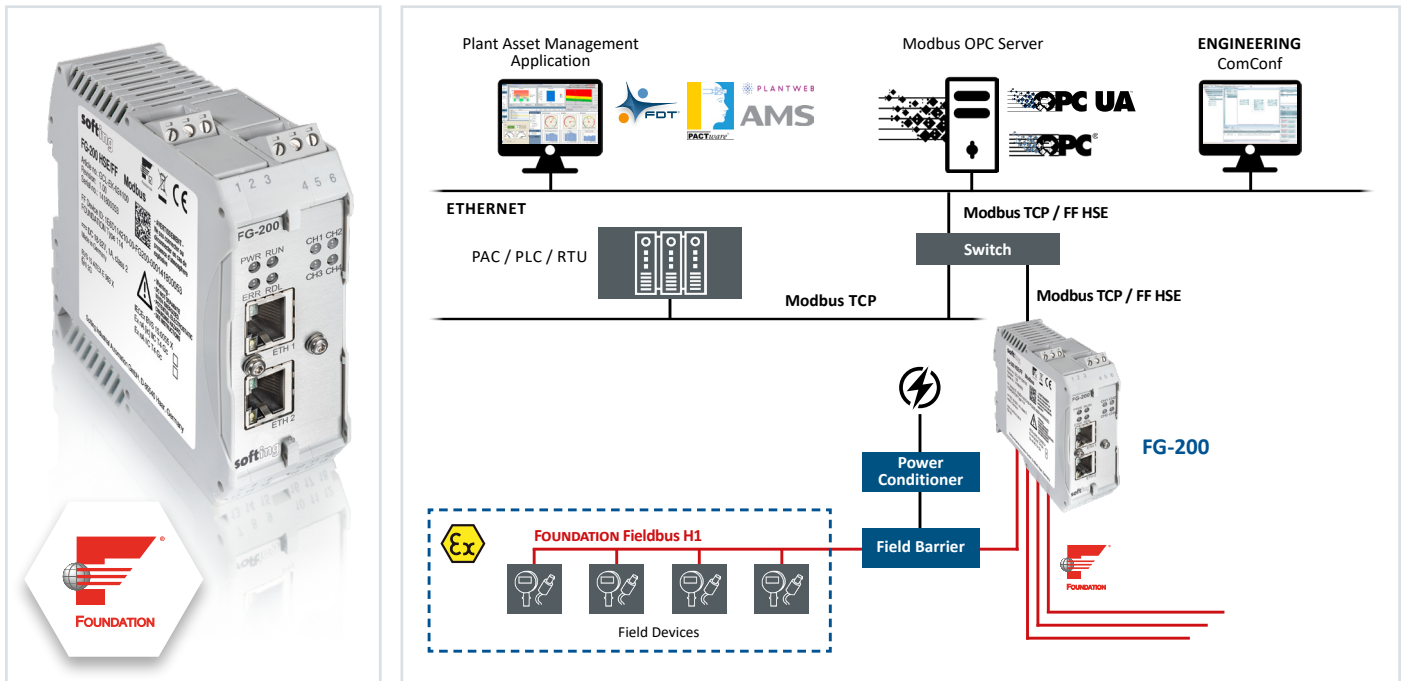

CAPEX-efficient Integration of FF-devices into Modbus Architectures

- Parallel support of up to 4 FF-H1 channels, each for max. 16 field devices
- Fast access to process data
- Suitable for use in hazardous areas
- Easy Commissioning:
 - Optional support of R. STAHL bus-Carrier Series 9419 and Fieldbus Power Supply 9412 products (cabling reduced to a minimum)
 - Modbus data import to web server reducing mapping efforts

Device Redundancy

- Redundancy link enabling device redundancy (D-3 according to FF-593)
- Automatic mirroring of configuration data
- Very fast redundancy switch-over

Prepared for Plant Asset Management tasks

- Visitor mode avoiding interference with network behavior
- Enabling asset management systems (e.g. Emerson's AMS) and Field Device Tool (FDT) frame applications (e.g. SMART VISION, FieldMate, Field Device Manager, FieldCare, or PACTware)

All Necessary Tools Included

- FF Configuration Tool for configuration of devices and cyclic communication
- PACTware for device configuration and basic asset management tasks

FG-200

Technical Data

Hardware	Processor	Altera Cyclone V SoC with dual-core ARM Cortex-A9
	Status LEDs (Gateway)	PWR (power supply), RUN (operation), ERR (error), RDL (redundancy link)
	Status LEDs (Fieldbus)	FF H1 activity per link
Interfaces and Connectors	Ethernet	2 * IEEE 802.3 100BASE-TX / 10BASE-T (only ETH1 supported) Connectors: RJ45
	FOUNDATION Fieldbus H1	4 FF H1 links, compliant to type 114 of FF physical layer profile (each link capable to operate independently as Link Master and/or Time Master) Transfer rate: 31.25 Kbit/s Fieldbus voltage range: 9 VDC ... 32 VDC, preferred voltage: 24 VDC Current consumption: 10 mA / link Connectors: 3-position screw connection, galvanically isolated
Physical Properties	Dimensions (H x W x D)	100 mm x 35 mm x 105 mm
	Weight	Approx. 0.25 kg
	Power Supply	18 VDC ... 32 VDC; SELV/PELV power supply mandatory; Typical input current: 200 mA, maximum input current: 1 A (allowing for in-rush current at switch-on) No power supply to FF H1 links through FG-200 HSE/FF Modbus
	Operating / Storage Temperature	-40 °C .. +70 °C / -40 °C .. +85 °C (see detailed mounting description in user manual)
	Relative Humidity	10 % ... 95 %, non-condensing
	Cooling	Convection, no fan
	Coating	Conformal coating based on ANSI / ISA-S71.04 G3
	Mounting	DIN rail 35 mm
	Protection Class	IP20
Software	Protocols	FOUNDATION Fieldbus H1, FOUNDATION Fieldbus HSE, Modbus TCP
	Redundancy	Device redundancy compliant to type D-3 according to specification FF-593
Conformity / Certifications	CE	EN61000-6-2, EN61000-6-4, EN55022 Limit Class A, EN55011
	Electromagnetic Compatibility (EMC)	FCC CRF47, Part 15 Section 15.107 and 15.109 (Class A), VCCI Class A Information Technology Equipment 2002
	Vibration / Shock	DIN EN 60068-2-6 Vibration / DIN EN 60068-2-27 Shock
	Hazardous Location Certifications	cULus: Class 1, Division 2, Groups A, B, C, D IECEX: Ex ec [ic] IIC T4 Gc ATEX: Ex II 3G ec [ic] IIC T4 Gc

Scope of Delivery

Hardware	FG-200
Software	Download from the Softing website : FF Configuration Tool, FDT CommDTM, PACTware
Documentation	Quick Startup Guide, User Manual

Order Numbers

GLA-EK-024102	FG-200
ACA-ZZ-020631	Redundancy Link (3-pole), Cable (30 cm) for connecting redundant pairs of FG-200

Your local Softing contact:

<http://industrial.softing.com>

optimize!
softing