


CANpro USB

High Speed USB to CAN Interface Card for Mobile Use

CANpro USB equips a PC or notebook with a top performing CAN interface with very short response times. It is suitable for a wide variety of CAN and CANopen applications like control, measurement, configuration, and analysis tasks and is also available as a heavy duty version.

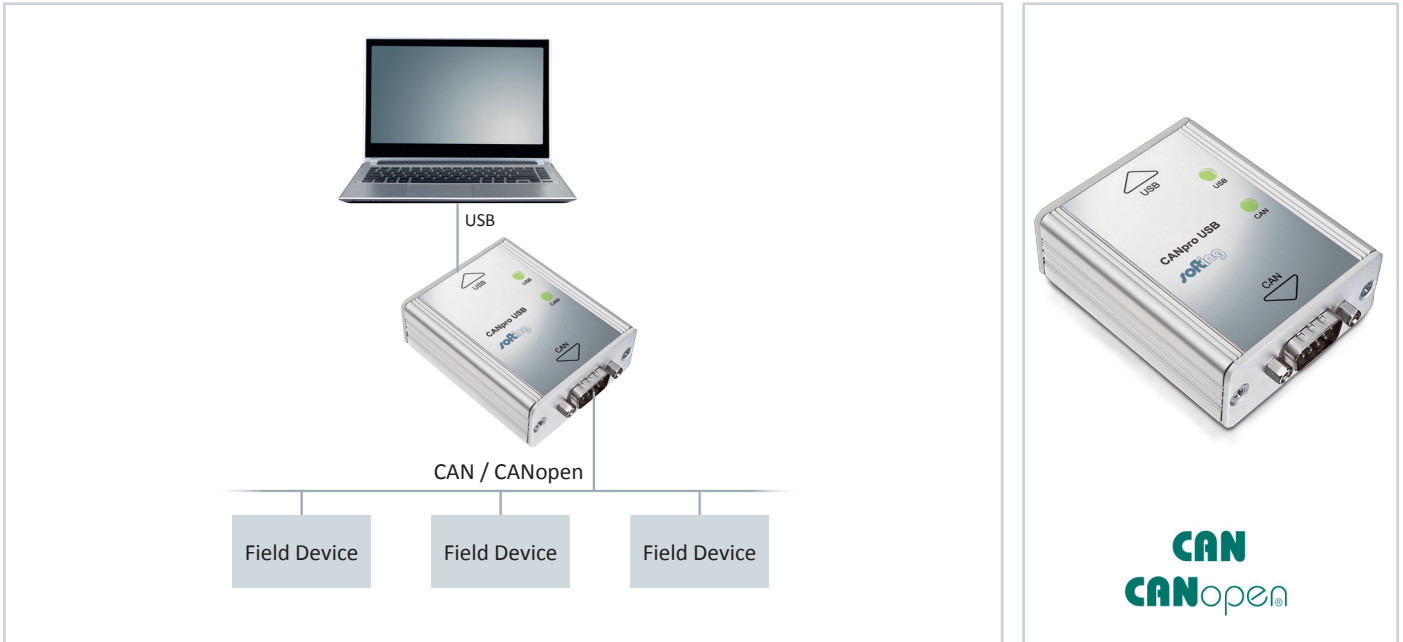

High Data Throughput Resulting in Short Response Time

- USB 2.0 High Speed standard
- One of the fastest CAN interfaces available on the market
- Processor and speed-optimized firmware designed for 100% bus load at 1 Mbit/s
- High data throughput and very short response times of 100 μ s to 500 μ s
- Suitable for running wide variety of applications, including time-critical ones
- Easy-to-use
- USB and CAN status shown by LEDs
- Easy installation by simply connecting USB cable to PC and D-Sub connector to CAN network
- No power supply required

Suitable for In-House or Mobile Usage

- Small but robust metal housing suited for everyday use
- Addressing standard mobile as well as stationary in-house types of applications
- Heavy duty version offering lockable USB cable connector and special mounting kit for fixing to PC, ideal for mobile use in harsh industrial environments

Comprehensive Functionality Supporting a Wide Variety of Use Cases

- Easy integration into CAN applications
- APIs based on C and .NET
- Support of FIFO and Object Buffering operating modes
- Free CANopen Client API for integration of applications like control, measurement, configuration and analysis

Technical Data

CAN Protocol and Available APIs	CAN V2.0 (11/29 Bit-IDs) CAN API CANopen Client API
---------------------------------	---

Bus Connection

Connector	9-pin D-sub male
Galvanically Isolated	Yes
Physical Layer	ISO 11898-2 (CAN High Speed)

PC Interface	USB 2.0 High Speed, 480 Mbit/s
--------------	--------------------------------

Indicators

USB LED	USB status
CAN LED	CAN status

Operation Temperature	0 °C ... +55 °C (standard version) / -20 °C ... +70 °C (heavy duty version)
Storage Temperature	-20 °C ... +70 °C (standard version) / -20 °C ... +70 °C (heavy duty version)
Relative Humidity	< 90 %, non-condensing
Dimensions	74 mm x 55 mm x 26 mm

Power Supply

Supply Voltage 5 VDC (±5 %) via USB connector

Current Consumption Typically 200 mA

Drivers Available for	Windows XP, Windows 7, Windows 8, Windows 10, Linux
-----------------------	---

Conformity



Scope of Delivery

Hardware (Standard Version)	CANpro USB (standard version), USB cable
Hardware (Heavy Duty Version)	CANpro USB (heavy duty version), lockable USB cable with cable connector and mounting kit
Software	Drivers, APIs, sample programs on CD-ROM
Documentation	Manual on CD-ROM

Order Numbers

DUL-00-012410	CANpro USB (standard version)
DUL-00-012411	CANpro USB (heavy duty version)

optimize!
softing

Softing Industrial Automation GmbH
Richard-Reitzner-Allee 6
85540 Haar / Germany
Tel.: +49 89 456 56-340
Fax: +49 89 456 56-488
info.automation@softing.com
http://industrial.softing.com

Softing Inc.
US Headquarter
7209 Chapman Highway
Knoxville, TN 37920 / USA
Tel.: +1 865 251 52 52
Fax: +1 865 579 47 40
info@softing.us
http://www.softing.us

Softing Industrial Automation GmbH
Äußere Sulzbacher Straße 159-161
90491 Nürnberg / Germany
Tel.: +49 911 544 27-0
Fax: +49 911 544 27-27
info.automation@softing.com
http://industrial.softing.com

Softing Inc.
US Sales Office
29 Water Street, Suite 301
Newburyport, MA 01950 / USA
Tel.: +1 978 499 96 50
Fax: +1 978 499 96 54
info@softing.us
http://www.softing.us

Buxbaum Automation GmbH
Thomas-Alva-Edison-Straße 1
7000 Eisenstadt / Austria
Tel.: +43 2682 704 560
Fax: +43 2682 205 77 00-5610
office@myautomation.at
http://myautomation.at

Softing Italia Srl
Via Padre Massimiliano Kolbe, 6
20090 Cesano Boscone (MI) / Italy
Tel.: +39 02 450 51 71
Fax: +39 02 450 41 41
info@softingitalia.it
http://softingitalia.it

Your local Softing Contact