

# How to Configure PROFITAP

Configuration of the PROFITAP for frame analysis in Analyzer IE PRO

Settings are done in PROFishark by pushing “Flash” after changing the settings

## Installation:

Select the USB stick in Windows Explorer and navigate to folder **C1AP-100-TF Software\User SetUp 4.0\Windows** and double-click the file **ProfiShark-100\_x.x.x.exe** to start the installation wizard. Follow the on-screen instructions.

After the installation the following 3 steps must be done:

## Configuration:

Filter:

ProfiShark 100 - 5.0.6

ProfiShark 100 found

MAC Address : 00:0e:c6:87:0f:16  
Firmware Type : TF  
Firmware Version : 4.0

Firmware up-to-date  
Version 4.0

Filter | Timestamps | CRC Errors

Enable Filter


Ethernet MAC Destination address : [ ] : [ ] : [ ] : [ ] : [ ] : [ ]  
Ethernet MAC Source address : [ ] : [ ] : [ ] : [ ] : [ ] : [ ]  
Ethernet Type : [ ] [ ]  
IPv4 Protocol : [ ]  
IPv4 Source address : [ ] . [ ] . [ ] . [ ]  
IPv4 Destination address : [ ] . [ ] . [ ] . [ ]

Keep Filter  
 Discard Filter

**PROFITAP**

Read Current Setup  
Apply  
Flash

## Timestamps:

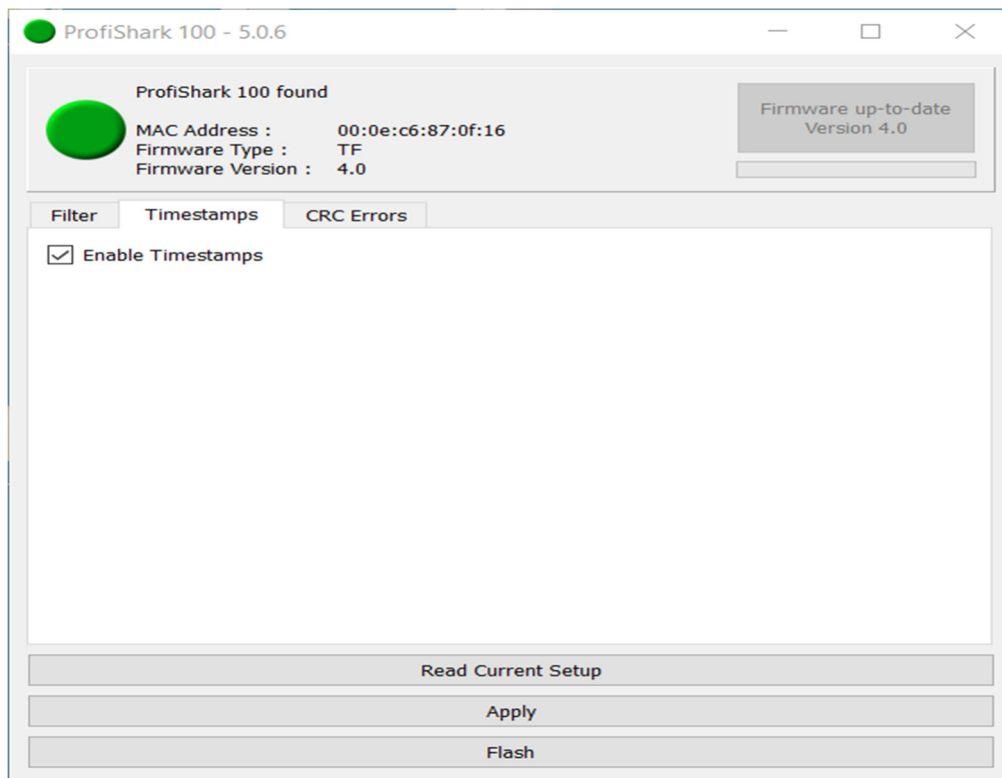

## CRC Errors:

