


TH LINK PROFINET

Efficient Network Maintenance and Diagnostics for PROFINET

The TH LINK PROFINET diagnostics hardware provides controller-independent access for monitoring and managing PROFINET-based networks. The diagnostic data is collected from networks comprising up to 254 nodes, and is made available to users through the TH SCOPE software application. TH LINK PROFINET is an easy-to-use hardware interface that suits the needs of industrial maintenance personnel.

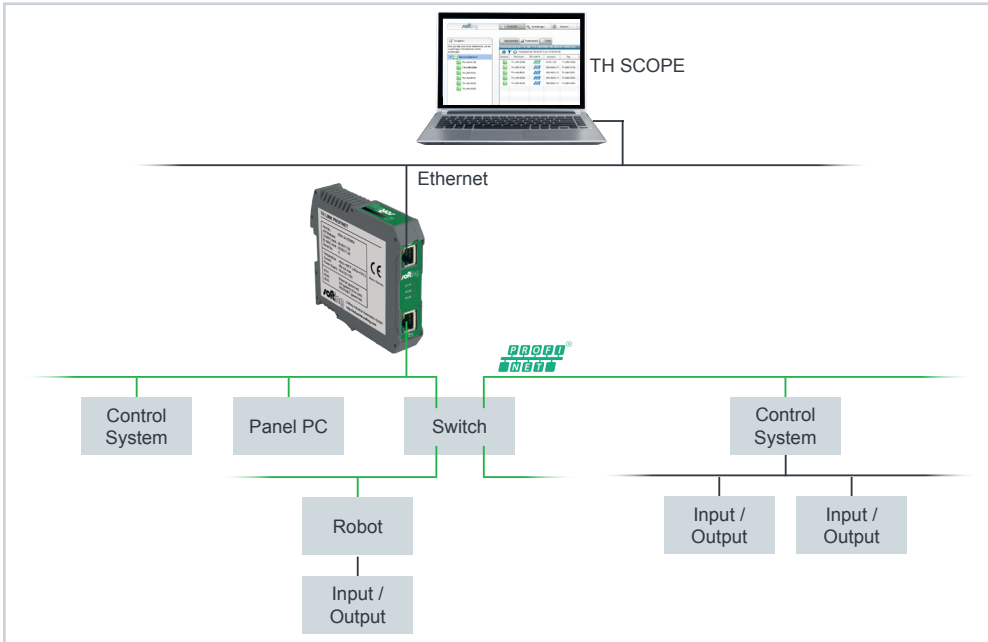

Plant Integration

- Controller-independent network access
- Interference-free integration into any port available in PROFINET networks (even during plant operation)
- Satisfying highest security requirements (no routing, separate access for office network and plant level)
- Network load limited according to PNO guidelines
- Easy integration into existing plants thanks to compact design

Powerful Data Collection

- Data collection for networks with up to 254 nodes (e.g. controllers, IP subnets)
- Operating as supervisor in existing PROFINET networks
- Seamless integration with TH SCOPE software for data visualization, data monitoring and plant asset management
- Easy to use web interface for configuration
- Quick and comprehensive network overview

Tailored Solution for Maintenance Staff and Plant Operators

- Suitable for network acceptance testing, monitoring and troubleshooting
- Intuitive handling and operation
- No configuration / engineering required
- Fault identification with intelligent troubleshooting assistance

Technical Data

Functionality	<ul style="list-style-type: none">• Network detection and data collection (active/passive for PROFINET networks)• Alarm notification in case of fault• Basic monitoring, configuration• Integrated web server• Configurable blacklist feature for robust operation• Comprehensive network overview for quick and easy observation
Input Voltage	24 VDC (18 VDC ... 32 VDC)
Current Consumption	max. 180 mA
Current Consumption Relay Contact	max. 100 mA
Operating Temperature	-40 °C ... +75 °C
Relative Air Humidity	5 % ... 95 % (non-condensing)
Ethernet Ports	RJ45 (10Base-T / 100Base-TX)
Supported SD Cards	See Release Notes
Mounting	35 mm DIN rail
Dimensions (HxWxD)	22,5 mm x 99 mm x 114,5 mm
Weight	120 g
Certifications	CE

Scope of Delivery

Hardware	TH LINK PROFINET
Documentation	Installation Manual, Release Note (by download)

Order Numbers

GDA-JA-003034	TH LINK PROFINET
---------------	------------------

Additional Products and Services

LRA-JY-003024	TH SCOPE (software key)
LRL-JY-003025	TH SCOPE (hardware key)
LRA-JY-003028	TH LINK PC Industrial Ethernet (software key)
LRL-JY-003029	TH LINK PC Industrial Ethernet (hardware key)
GDA-JY-003037	TH LINK Industrial Ethernet
TRA-PN-TECH	Training "PROFINET Technology"
TRA-PN-CERTENG	Training "PROFINET Commissioning and Troubleshooting"

optimize!
softing

Softing Industrial Automation GmbH
Richard-Reitzner-Allee 6
85540 Haar / Germany
Tel.: +49 89 456 56-340
Fax: +49 89 456 56-488
info.automation@softing.com
<http://industrial.softing.com>

Softing Inc.
US Headquarter
7209 Chapman Highway
Knoxville, TN 37920 / USA
Tel.: +1 865 251 52 52
Fax: +1 865 579 47 40
info@softing.us
<http://www.softing.us>

Softing Industrial Automation GmbH
Äußere Sulzbacher Straße 159-161
90491 Nürnberg / Germany
Tel.: +49 911 544 27-0
Fax: +49 911 544 27-27
info.automation@softing.com
<http://industrial.softing.com>

Softing Inc.
US Sales Office
29 Water Street, Suite 301
Newburyport, MA 01950 / USA
Tel.: +1 978 499 96 50
Fax: +1 978 499 96 54
info@softing.us
<http://www.softing.us>

Buxbaum Automation GmbH
Thomas-Alva-Edison-Straße 1
7000 Eisenstadt / Austria
Tel.: +43 2682 704 560
Fax: +43 2682 205 77 00-5610
office@myautomation.at
<http://myautomation.at>

Softing Italia Srl
Via Padre Massimiliano Kolbe, 6
20090 Cesano Boscone (MI) / Italy
Tel.: +39 02 450 51 71
Fax: +39 02 450 41 41
info@softingitalia.it
<http://softingitalia.it>

Your local Softing Contact