


# eATM tManager® for ControlLogix®

Connect ControlLogix PLCs to analytics and dashboards in about 10 minutes

- Collect information from islands of PLCs and connect natively upstream to SQL databases and cloud for analytics, dashboards, and process optimization
- In-chassis PLC module, no PC in the middle, no coding, no OPC translation
- Most direct method to connect PLCs (OT) directly to IT business apps for analytics, dashboards, and digital transformation

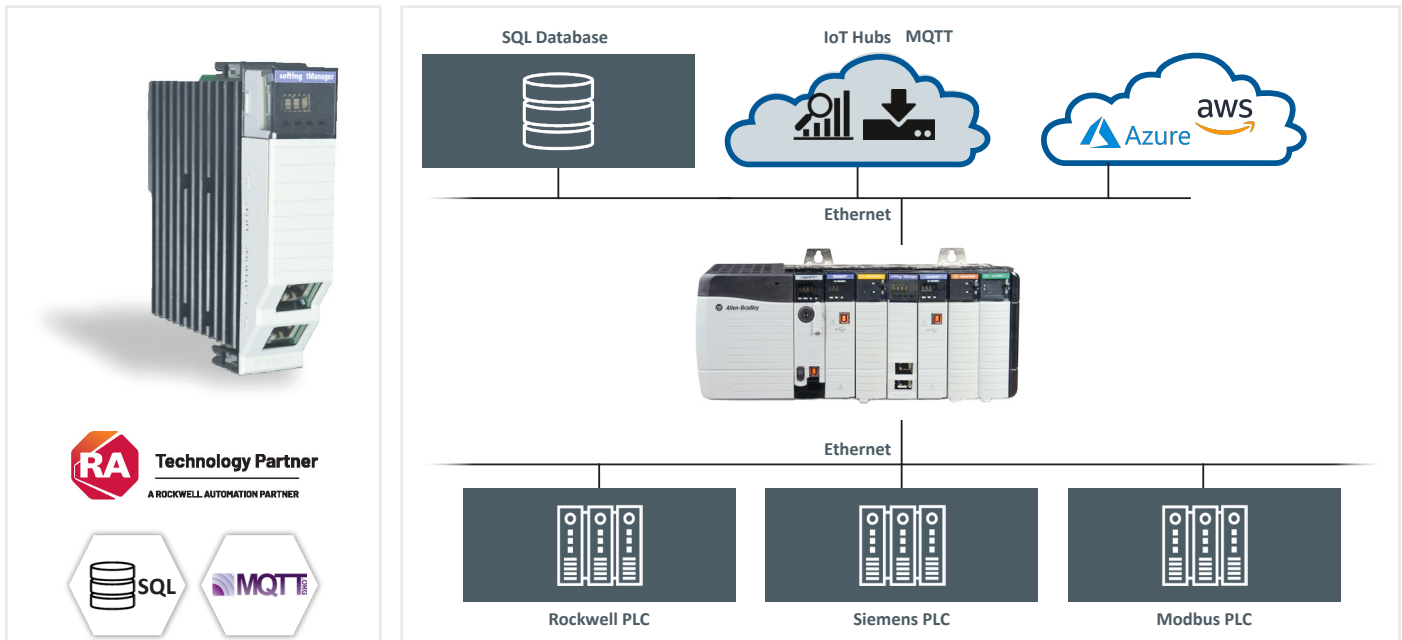

## Easy and Fast PLC Connectivity to Analytics

tManager digital transformation solution enables PLCs to connect to IT dashboards, analytics, business metrics, or applications like track & trace, high speed sorting, and recipe management to optimize business processes. No coding, no PC in the middle, no OPC protocol translation. Just easy-to-use menu-driven selections.

- Natively browse Logix tags and natively connect to SQL, ORACLE, AWS using AWS IOT core, and AZURE using IOT Hub
- Collect data from Rockwell, Siemens or Modbus controllers, then connect upstream to analytics
- Access all leading cloud platforms using MQTT

## Rock Solid Security

- In-chassis module, no anti-virus updates, no security patches
- Configure with software, then disconnect software during runtime
- No access to SQL code, so editing and creation of malicious SQL commands not possible
- Support for AWS and Azure certificates and SQL encryption

## Robust Data Handling

- In-chassis industrial PLC module that's built for the OT environment, and replaces the PC that's not
- No need to modify PLC logic to read tags such as monitoring key performance indicators
- Eliminate data loss through use of store and forward (local buffering) and redundancy using failover server
- Time-stamped data and logs saved of all transactions for audit
- E-mail notifications, Logix status tags, for transaction status and system operation

optimize!  
**softing**

# eATM tManager for ControlLogix

## Technical Data

<b>Hardware</b>	Connectors	2 x Ethernet ports (independent hardware interfaces)(10M/100M/1G)
	Power Consumption	5 VDC, 7 W (power supply through ControlLogix PLC backplane)
	Temperature	0 °C ... 60 °C (operating) 0 °C ... 80 °C (non-operating)
	Relative Humidity	5 % ... 95 %, non-condensing
	Mounting	ControlLogix single-slot module
	Vibration	2 g @ 10 - 500 Hz
	Shock	30 g (operating) 50 g (non-operating)
	Memory	7 GB onboard memory (for Store and Forward if database connectivity is lost)
	Status Tags	eATM tManager for ControlLogix health, Store and Forward state, successful transaction, complete transaction handshaking
	Logging	Transactions, alarms/alerts, performance
<b>tManager connections via Ethernet port</b>	SQL Database Connectors	Microsoft SQL, Oracle, MySQL, PostgreSQL, AS/400 IBM DB2 (select up to 2)
	Cloud Connector	MQTT option supports topic publish/subscribe and includes AWS IoT Core and Azure IoT Hub connectors
	Additional Connectors	Siemens SIMATIC S7 (for collecting islands of Siemens SIMATIC S7 PLCs and connecting directly to the SQL database) Modbus TCP (for collecting islands of Modbus PLCs and connecting directly to the SQL database)
	Communications Adapters	TCP/UDP, FTP, e-mail notification (SMTP outbound included with all adapters)
	Supported Controllers (collect tags from a max of 16 controllers, no tag limit)	Rockwell Allen-Bradley ControlLogix, CompactLogix, PLC-5, SLC500, MicroLogix 1100, Micrologix 1500 over Ethernet/IP, DH+, DH485 and ControlNet (via ControlLogix bridge module) Siemens SIMATIC S7-300, S7-400, S7-1200, S7-1500 over Industrial Ethernet Modbus TCP-compatible controllers (Schneider Electric, Wago, Beckhoff, Phoenix Contact, etc.)
	Database Functions	Insert, Update, Select, Stored Procedures
<b>Certifications</b>	CE, RoHS	

## Scope of Delivery

Hardware	eATM tManager for ControlLogix, in-chassis module
Software	For initial module configuration and communication status only (software is not used for transactions)
Documentation	Quick Startup Guide

## Order Numbers

56EATM-TMGR/B (MSSQL)	eATM tManager for ControlLogix with MSSQL adapter (including CLX BP driver, AWS, and Azure connector) Series B
56EATM-TMGR/B (ORACLE)	eATM tManager for ControlLogix with ORACLE adapter (including CLX BP driver) Series B
56EATM-TMGR/B (MSSQL+ORACLE)	eATM tManager for ControlLogix with MSSQL and ORACLE adapters (including CLX BP driver) Series B
56EATM-TMGR/B (MYSQL)	eATM tManager for ControlLogix with MYSQL Aadapter (including CLX BP driver) Series B
56EATM-TMGR/B (AS400/DB2)	eATM tManager for ControlLogix with AS400/Series i DB2 adapter (including CLX BP driver) Series B
56EATM-TMGR/B (PGSQL)	eATM tManager for ControlLogix with PostgreSQL adapter (includes CLX BP driver) Series B
56EATM-TMGR/B (FTP)	eATM tManager for ControlLogix with FTP adapter (including CLX BP driver) Series B

## Additional Products and Services

56EATM-TMGR/B (MODBUS-TCP)	MODBUS-TCP/IP driver support for eATM tMANAGER product Series B
56EATM-TMGR/B (S7 ADAPTER)	Siemens SIMATIC S7 driver support for eATM tMANAGER product Series B
56eATM-TMGR/B (SPARE)	eATM tManager for ControlLogix with configuration software and no licenses installed
56EATM-TMGR/B (MSSQL ADPT)	Additional MSSQL adapter support for eATM tManager product Series B (for existing module with one standard adapter)
56EATM-TMGR/B (ORACLE ADPT)	Additional ORACLE adapter support for eATM tManager product Series B (for existing module with one standard adapter)
56eATM-TMGR/B (MQTT ADPT)	Additional MQTT adapter support for eATM tManager product Series B (for existing module with one standard adapter)
56EATM-TMGR/B (TCP&UDP ADPT)	Additional TCP/UDP adapter support for eATM tManager product Series B (for existing module with one std adapter)

Please contact the Softing sales representative if your required adapter is not listed.

Your local Softing contact:

<https://industrial.softing.com/us/>

