


# echocollect e

## Gateway for the Integration of Process Data with Higher-level Systems and IoT Solutions

echocollect e is an industrial multi-protocol gateway providing a modern process data management solution. It offers bidirectional real-time connectivity between PLCs and databases, and direct OPC UA and OPC Classic connectivity. Its functionality includes both local data logging and direct integration of data into IoT cloud applications via MQTT.

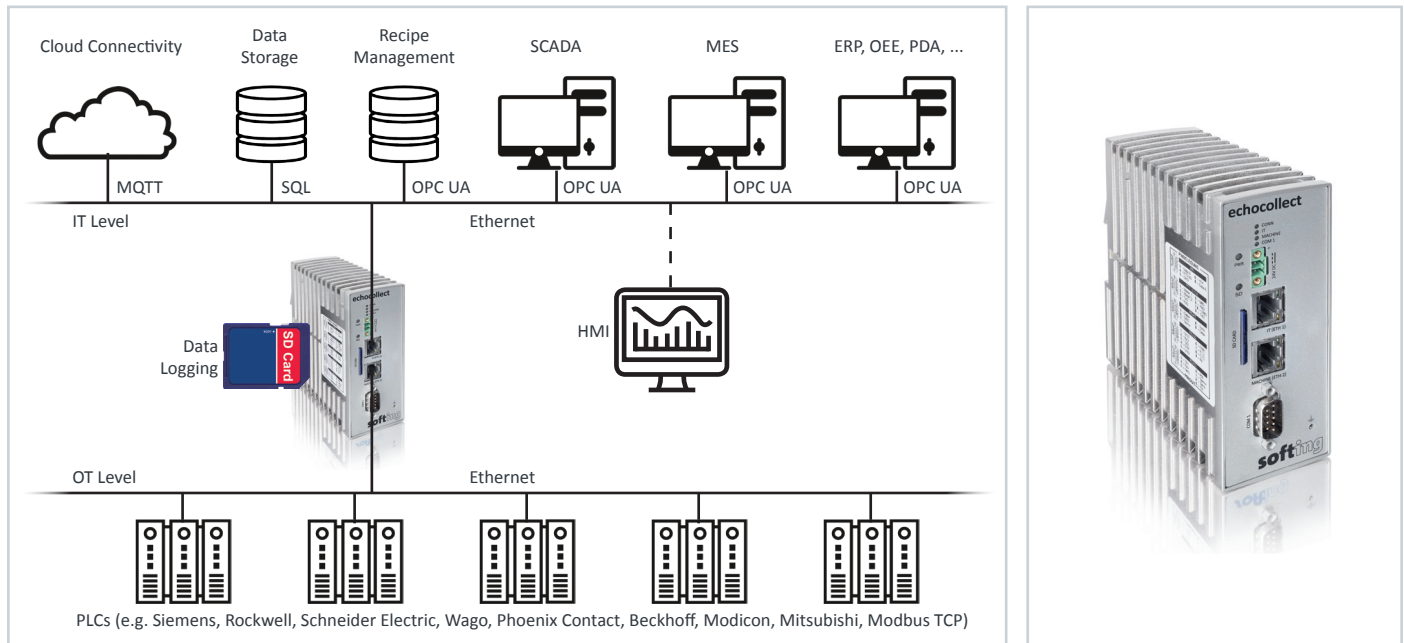

### Integration of Existing Systems in New Quality Assurance Systems

- Independent real-time collection of manufacturing, process or quality data directly from programmable logic controllers (PLC) and delivery to higher-level management systems, such as ERP or MES system
- Recipe manager functionality for writing data blocks to PLCs
- Direct connectivity via SQL database protocols, platform-independent OPC UA technology or MQTT Publisher functionality
- Support of more than 50 PLC types addressable via Ethernet

### Excellent Data and Network Security

- Buffering of arriving data and addition of time stamps in case of broken connections, automatic forwarding once connection has been reestablished
- Option for parallel data logging on SD card for traceability reasons
- Physical network separation between production systems and commercial IT networks
- State-of-the-art OPC UA security: Optional encryption of transmitted data and authentication via certificates

### Lowered IT Maintenance Costs and Investment Protection

- echocollect as standard component, addition of extra functionality without modifying existing systems
- No need for additional PC requiring software updates and administration
- Working for years once configured – untouched, without updates and with zero maintenance costs
- Plug-and-go replacement, if necessary, using configuration stored on SD card
- Very easy configuration by straightforward project import without requiring PLC modifications and programming skills

### Easy Live Data Visualization

- Native web technology for easy and cost-efficient visualization of process, manufacturing and quality data using standard web browser without any plug-ins
- No need for OPC Server or complex SCADA system
- Scalable, resolution-independent vector graphics for consistent display of data on wide variety of network enabled devices like desktop PCs, laptops, smart phones, tablet PCs or industrial control panels

optimize!  
**softing**

## Technical Data

Ethernet Addressable Controllers	Siemens SIMATIC S7 and S5, controllers with Modbus TCP (Wago, Beckhoff, Phoenix Contact, Schneider Electric, etc.), Mitsubishi (Melsec-Q), etc.
Ethernet Protocols	TCP/IP, RFC1006 (ISO on TCP), ISO (H1), S5, S7, TCP/IP with PLC header, Modbus TCP, Melsec-Q, raw data
Ethernet Interfaces	2 x independent interfaces TP (RJ45), 10/100 MBit/s
Embedded OPC UA Server	Symbolic Mapping; Browsing, Read, Write, Subscribe; Self-Discovery Service; possible reconfiguration without device restart; possible multiple Client connections, optional read-only PLC connection; OPC UA Security with password or certificates
Embedded MQTT Publisher	Establishment of MQTT Broker connection, optional user authentication and data encryption, easy topic generation from existing symbols, maximum of 1,000 topics, adjustable publishing interval
Supported Databases	MySQL, Oracle, DB2, MS-SQL
Other Protocols	Telnet, SMTP (email notification), OPCpipe (OPC Tunnel)
Supported Engineering Tools for Symbol Import	SIMATIC STEP 7, TIA Portal
Limitation	Maximum of 5 PLC connections, 10,000 items in total Data mapping PLC - database must be structured in 400 tables and 200 items per table
Visualization	atvise webMI visualization, functional level 'Advanced' (fully event-driven data exchange) Limited to up to 50 visualized items per echocollect (optional upgrade possible), maximum of 5 simultaneously accessing browsers
Configuration Software	Softing NetCon for device configuration, atvise builder for SCADA project editing, dataFEED Exporter for symbol import
Power Supply	24 VDC, ca. 0,3 A
Ambient Conditions	Operating temperature: 0 °C ... 55 °C, storage temperature: -20 °C ... 70 °C
Dimensions (H x W x L)	131 mm x 47 mm x 111 mm
Weight	ca. 0,4 kg
Mounting	35 mm DIN Rail
Protection Class	IP20
Certifications	CE

## Scope of Delivery

Hardware	Multi-protocol gateway echocollect e, SD card, connector for power supply*
Software	Net configuration software on CD-ROM, also downloadable from Softing website
Documentation	Quick Start leaflet, context-based online help, CD-ROM with product handbook and configuration tutorials, also downloadable from Softing website

\* A plug-in powerpack is not included in the delivery. If needed, please order this separately.

## Order Numbers

GAL-YY-143101	echocollect e (connectors: 2 x Ethernet, 1 x TTY)
LRA-YY-143001	Upgrade echocollect: License for database access to Oracle, DB2 and MSSQL (default: MySQL only)
LRA-YY-143002	Upgrade echocollect: License enabling data logging on SD Card (default: no data logging)
LRA-YY-143004	Upgrade echocollect: License supporting unlimited number of visualization items (default: maximum of 50 visualization items)
LRA-YY-143005	Upgrade echocollect: License embedded OPC UA Server (default: no embedded OPC UA Server)
LRA-YY-143007	Upgrade echocollect: License MQTT Publisher functionality (default: no MQTT support)
LRA-YY-143115	Upgrade echocollect: License enabling maximum of 15 PLC connections (default: maximum of 5 PLC connections)

## Additional Products and Services

700-5596-04	AC Adapter, 24 VDC, Euro, UK, or USA
LRL-DY-131701	OPCpipe client
MEA-YY-144002	CD atvise elements, 4,000 high-quality bitmaps and vector graphics in SVG format
GPL-CS-191000	echolink sS7-compact
110-1000-01	Industrial Ethernet – Troubleshooting in Automation, 3 days

optimize!



Your local Softing Contact

**Softing Industrial Automation GmbH**  
Richard-Reitzner-Allee 6  
85540 Haar / Germany  
Tel.: +49 89 456 56-340  
Fax: +49 89 456 56-488  
info.automation@softing.com  
http://industrial.softing.com

**Softing Industrial Automation GmbH**  
Äußere Sulzbacher Straße 159-161  
90491 Nürnberg / Germany  
Tel.: +49 911 544 27-0  
Fax: +49 911 544 27-27  
info.automation@softing.com  
http://industrial.softing.com

**Buxbaum Automation GmbH**  
Thomas-Alva-Edison-Straße 1  
7000 Eisenstadt / Austria  
Tel.: +43 2682 704 560  
Fax: +43 2682 205 77 00-5610  
office@myautomation.at  
http://myautomation.at

**Softing Inc.**  
US Headquarter  
7209 Chapman Highway  
Knoxville, TN 37920 / USA  
Tel.: +1 865 251 52 52  
Fax: +1 865 579 47 40  
info@softing.us  
http://www.softing.us

**Softing Inc.**  
US Sales Office  
29 Water Street, Suite 301  
Newburyport, MA 01950 / USA  
Tel.: +1 978 499 96 50  
Fax: +1 978 499 96 54  
info@softing.us  
http://www.softing.us

**Softing Italia Srl**  
Via Padre Massimiliano Kolbe, 6  
20090 Cesano Boscone (MI) / Italy  
Tel.: +39 02 450 51 71  
Fax: +39 02 450 41 41  
info@softingitalia.it  
http://softingitalia.it